



technical specifications



1/6 BBL



20L



30L

GENERAL

<i>Life Cycle</i>	Single Use		
<i>Valve</i>	KeyKeg		
<i>Product types</i>	Beverages		

DIMENSIONS

<i>Volume</i>	5.16 gal	5.28 gal	7.93
<i>Diameter</i>	9.45"		11.81"
<i>Height</i>	22.13"	22.52"	
<i>Weight</i>	2.6 lbs		3.3 lbs
<i>Residual content</i>	< 0.006 gal		

FILLING

<i>Fill before</i>	24 months after production		
<i>Suitable for automatic filling</i>	Yes		
<i>Filling position</i>	Upside down		
<i>Pre-pressure</i>	32 psi (± 4 psi)		

BARRIER PROPERTIES

<i>O2 pick-up after 6 months at 68 °F</i>	< 30 ppb	<20 ppb
<i>CO2 loss after 6 months at 68 °F</i>		
<i>UV ingress</i>	None	


PHYSICAL-MECHANICAL

<i>Temperature range</i>	32 - 104 °F		
<i>Max. dispense pressure</i>	60 psi		
<i>Max. working pressure</i>	87 psi		



MATERIALS

<i>Gripring</i>	<i>rPP</i>
<i>Outer container</i>	<i>PET</i>
<i>Closure</i>	<i>PA-GF30</i>
<i>Valve housing</i>	<i>PP/PE</i>
<i>Inner container</i>	<i>PET</i>
<i>Bag</i>	<i>PE/Alu/PA</i>
<i>Sleeve</i>	<i>PP</i>
<i>Basecup</i>	<i>PE</i>

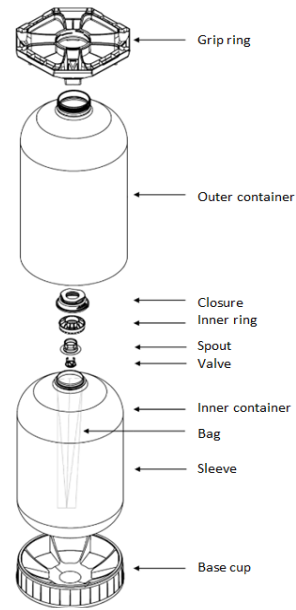

All food contact materials are approved according to regulations FDA 21 CFR 177.1520, EC 1935/2004, EU 10/2011 and/or further amendments.

